
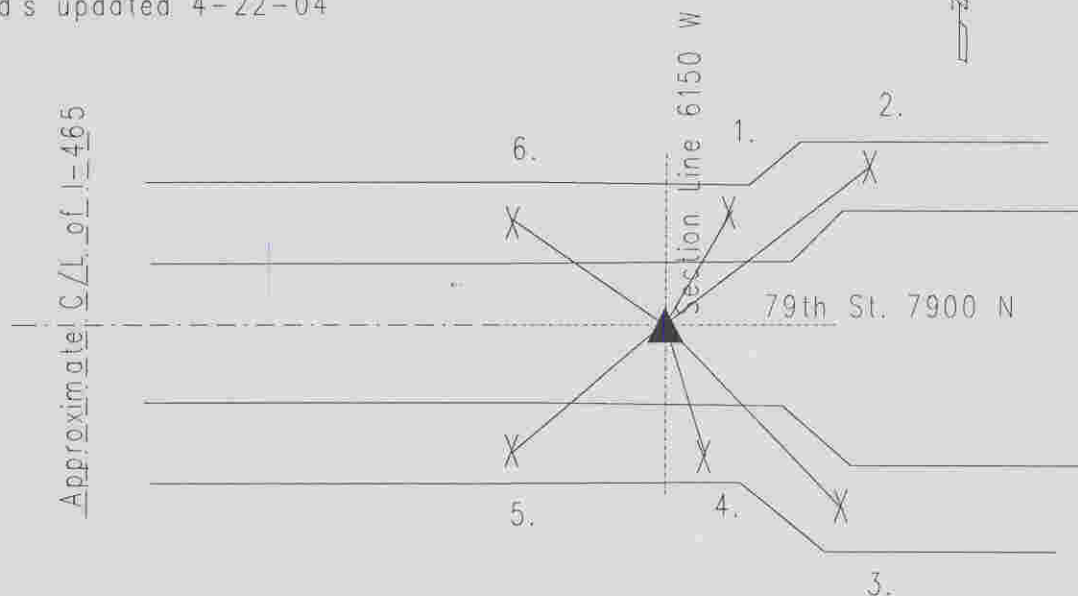


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 26 TOWNSHIP 17 RANGE 2
DATE: 11-22-04
PARTY CHIEF: Wilcoxon
CREW: Copperweld 6.1.05
TYPE OF MARKER: Cut 'x' set by GPS
METHOD OF ESTABLISHMENT: County:10-10-01

IN. S.P.C. E ZONE NAD '83
NAME: 17022602
N: 516143.2110(m)
E: 48460.8170(m)
coord's updated 4-22-04

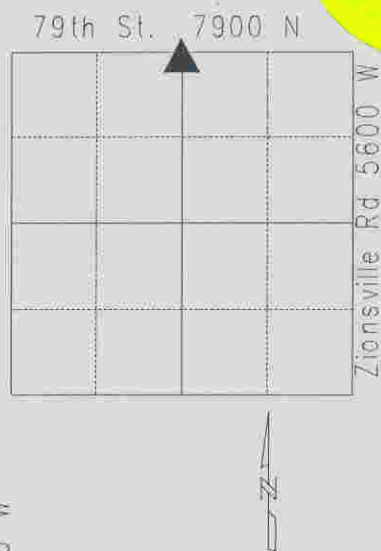

Original post set 1821 by Wm. B. Laughlin with witnesses: 30" poplar N 35 W 24 links; 12" beech S 35 E 9 links per Marion County Atlas pg. 4. Survey by Percy Hosbrook 8-5-1851 indicates a stump of one witness with marks plain and rock was set. per Pike Township Legal Survey Book pg. 19. Survey by D. B. Hosbrook 10-15-1852 indicates the witness: 20" beech N 30 E 22 links; 18" beech S 5 W 28 Links per Pike Township Legal Survey Book pg 22. Burres 1-23-64 called cut 'x' in concrete. Miller 5-9-75 called cut 'x' in concrete. Wilcoxon 8-1-88 called PK nail. Wilcoxon 4-7-97 called PK nail. Excavated by Wilcoxon 9-20-01 and PK nail was found 13" down and a cut 'x' was found 18" down. Harrison set.

17022602

REF.	DISTANCE	DESCRIPTION
1.	18.23'	Cut 'x' in sidewalk
2.	28.53'	Cut 'x' in curb
3.	27.85'	Cut 'x' in curb
4.	18.38'	Cut 'x' in sidewalk
5.	25.59'	Cut 'x' in sidewalk
6.	25.29'	Cut 'x' in sidewalk